

Wall Pantry Assembly Instructions

This assembly instruction applies to all wall pantry cabinets (**Beacon Hill Maple, Colonial Maple, Oak Island and Lexington**).

Parts included:

	Item	Qt
A	Face Frame with Doors	1
B	Side Panel (Left and Right)	2
C	Bottom	1
D	Top	1
E	Back Panel	1
F	Toe Kick	1

	Item	Qt
G	Shelf Clips	12
H	Shelves (with cam lock holes)	2
I	Adjustable Shelves	3
J	¾" Back Panel Screws	4
K	1" Top Panel Screws	2
L	Cam Locks (set)	24

Step by step

1. Check and count the items in the box before your installation. If you are short any pieces, stop and call the supplier. Otherwise, follow the steps below.
2. Put the face frame (A) face down on a flat soft working surface (Figure 1).
3. Install side panels: insert right and left side panels (B) into the grooves of face frame (A) and align the cam lock connectors (Figure 2). Lock the cam lock with a screwdriver by turning the screw 180 degree clockwise (Figure 3).
4. Install the top and bottom: gently spread side panels and insert top (D) and bottom (C) into the grooves of side panel (B) until they touch the face frame (A) (Figure 4). Align them and lock each cam lock (Figure 3).
5. Install the back panel: insert and slide the back panel (E) into groove in rear of side panel (B) (Figure 5). Align the back panel (E) and enforce it with 4 ¾" Back Panel screws (H) into the predrilled holes on the back panel.
6. Install the shelves (For **W3015, W3615** and **W3018**, ignore this step): insert the shelf clips (F) into the holes on the side panels at the desired height and slide in the shelves (G).
7. Place the "L" brackets into the corner of the face frame and the side panels at top and bottom of cabinet. Then fasten the screws to them as Figure 7.

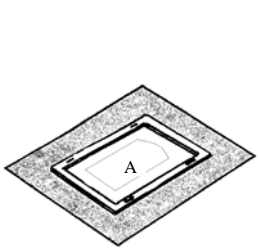


Figure 1.




Figure 2.




Figure 3.




Figure 4.

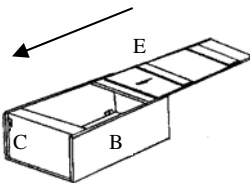


Figure 5.




Figure 6.

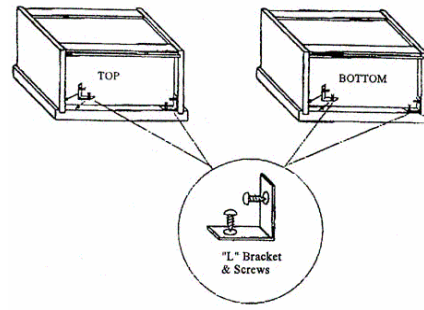


Figure 7.